

Arktite CES and CESD delayed action circuit breaking receptacles

Cl. I, Div. 1 & 2, Group D[Ⓐ] (CESD only)
Cl. I, Div. 1 & 2, Groups C, D (CES only)
Explosionproof
Wet Locations

2P

Applications:

Arktite® CES and CESD receptacles with CPH plugs are used:

- With portable electrically operated devices, such as motor generator sets, compressors, conveyors, portable tools, lighting systems and similar equipment
- In locations which are hazardous due to the presence of flammable vapors or gases
- In damp or corrosive locations
- At petroleum refineries, chemical and petrochemical plants and other process industry facilities where similar hazards exist

Features:

- CES and CESD receptacles are equipped with a delayed action rotating sleeve which prevents complete withdrawal of the CPH plug in one continuous movement
- The delayed action feature permits the plug to be used as an emergency push-pull switch
- Details of operation are illustrated and described to the right
- Receptacles are factory sealed to simplify installation and wiring; external seals are not required
- The 30 ampere receptacles are provided with pressure terminals for field connection; the 60 ampere receptacles have flexible leads; plugs are equipped with solder terminals
- Two arrangements are provided for the 3/4" and 1 1/4" conduit hubs, as shown in the listings and dimensions

Certifications and compliances:

NEC/CEC:

- Class I, Divisions 1 & 2, Groups C, D (CES only)
- Class I, Divisions 1 & 2, Group D[Ⓐ] (CESD only)

ANSI/UL standard:

- UL1010

CSA standard:

- C22.2 No. 182.1



Figure 1



Figure 2



Figure 3



Figure 4

Figure 1 shows a CES receptacle assembly with CPH plug fully engaged.

Figure 2 shows the plug withdrawn until it is stopped by the delayed action sleeve. In this position, the circuit has been broken and the arc has been snuffed in the contact chambers.

Figure 3 shows the delayed action receptacle sleeve rotated approximately 45° to allow withdrawal of plug from receptacle.

Figure 4 shows the plug completely withdrawn. To accomplish this, the delayed action sleeve must be rotated counter-clockwise. The time required to actuate the mechanism permits dissipation of the arc-generated heat before contacts and arcing chambers are opened to the atmosphere. When inserting the plug, the reverse procedure is followed.

Standard materials:

- Back boxes – Feraloy iron alloy
- Receptacle housings – 30A: copper-free aluminum; 60A: Feraloy iron alloy
- Plug bodies – copper-free aluminum
- Insulation – Krydon fiberglass-reinforced polyester
- Contacts – brass or hard drawn copper

Standard finishes:

- Feraloy – electrogalvanized and aluminum acrylic paint
- Copper-free aluminum – natural
- Krydon – red
- Brass and copper – natural

Options:

Description	Suffix
• Special polarity.....	S4
<i>Receptacle interior rotated 22 1/2° to right and plug changed to match</i>	
<i>For use where two or more receptacles of the same ampere rating, style and number of poles are to be installed in the same area for use on different voltages</i>	

Electrical ratings:

- 30 and 60 amperes

Grounding:

- NEC Article 501 and CEC Part 1, Section 18 require that metal frames or exposed non-current-carrying metal parts of portable devices used in hazardous locations be grounded through an extra conductor in the portable cord
- CES and CESD receptacles and CPH plugs are provided with an extra grounding pole for attachment of the grounding wire; in the plugs, provision is made for attachment of the grounding wire to the grounding pole; in addition, direct connection is provided between plug and receptacle housings and the ground pole; in the receptacles, grounding is accomplished through the conduit system

Interchangeability of plugs with non-hazardous location receptacles:

- CPH plugs can also be used with standard AR and NR receptacles of the same ampere rating, style and number of poles, thus permitting portable devices which are suitable for use in hazardous locations to be connected to receptacles in both hazardous and non-hazardous areas
- Portable devices for non-hazardous areas equipped with Arktite APJ and NPJ plugs cannot be used with CES and CESD receptacles

[Ⓐ]For U.S., CESD is also suitable for Class I, Group C when used with immediately adjacent seals.


Arktite CES and CESD delayed action circuit breaking receptacles

Cl. I, Div. 1 & 2, Group D[Ⓞ] (CESD only)
Cl. I, Div. 1 & 2, Groups C, D (CES only)
Explosionproof
Wet Locations

2P

Ordering information:

CES/CESD receptacles

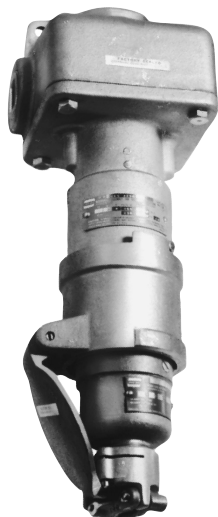

CES receptacles with three hubs – one on each side and one at top – and two pipe plugs with CPH plug fully engaged



CESD receptacles with vertical through feed hubs and one pipe plug; removable threaded cover at top to facilitate pulling wires

Hub size	Configuration	Phase	Max. HP	Max. amperage	Volts at 60 cycles AC	Cat. # CES	Cat. # CESD
3/4"	2-wire, 3-pole	1	1/2	7	480 [Ⓞ]	CES2213	CESD2213
			1 1/2	30	120-240		
3/4"	3-wire, 4-pole	3	1	7	480 [Ⓞ]	CES2214	CESD2214
			3	30	120-240		
1 1/4"	2-wire, 3-pole	1	3	30	480 [Ⓞ]	CES4233	CESD4233
				60	120-240		
1 1/4"	3-wire, 4-pole	3	5	30	480 [Ⓞ]	CES4234	CESD4234
				60	120-240		

CPH plugs



CPH plugs with mechanical cable grip and neoprene bushing

Configuration	Phase	Max. HP	Max. amperage	Volts at 60 cycles AC	Cable diameter		
					Cat. # 0.375 - 0.875"	Cat. # 0.500 - 0.875"	Cat. # 0.875 - 1.375"
2-wire, 3-pole	1	1/2	7	480 [Ⓞ]	CPH7713		CPH7913
		1 1/2	30	120-240			
3-wire, 4-pole	3	1	7	480 [Ⓞ]	CPH7714		CPH7914
		3	30	120-240			
2-wire, 3-pole	1	3	30	480 [Ⓞ]		CPH7733	CPH7933
			60	120-240			
3-wire, 4-pole	3	5	30	480 [Ⓞ]		CPH7734	CPH7934
			60	120-240			

[Ⓞ]For U.S., CESD is also suitable for Class I, Group C when used with immediately adjacent seals.



[Ⓞ]CSA certified units are rated at 600 volts.

Arktite CES and CESD delayed action circuit breaking receptacles

Cl. I, Div. 1 & 2, Group D (CESD only)
Cl. I, Div. 1 & 2, Groups C, D (CES only)
Explosionproof
Wet Locations

2P

Dimensions (in inches):

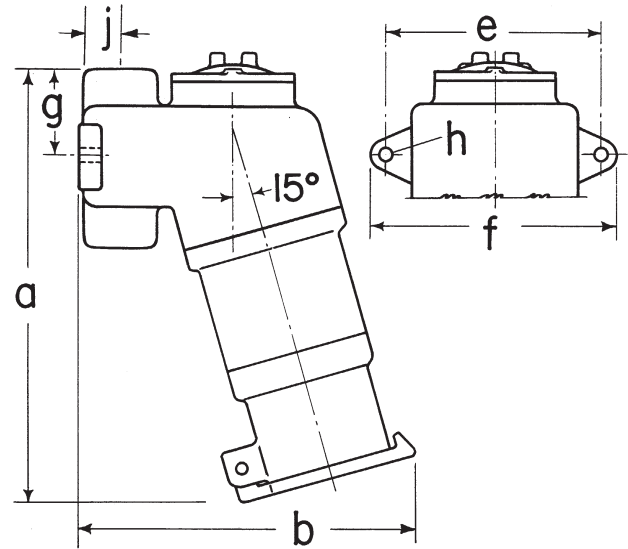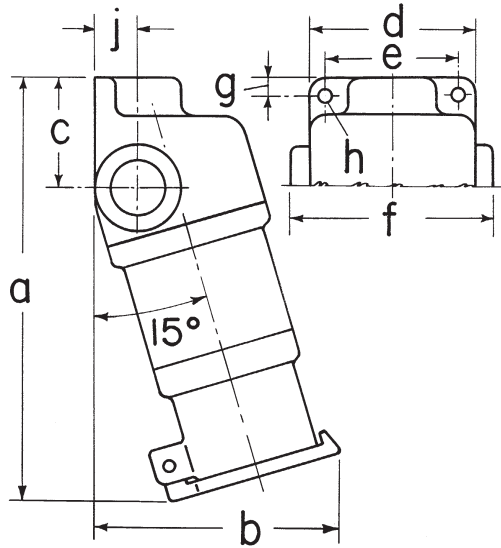


CES

Cat. #	a	b	c	d	e	f	g	h	j
CES2213	7 ¹ / ₁₆	4 ⁵ / ₈	2 ³ / ₁₆	3 ³ / ₈	2 ¹ / ₄	4 ¹ / ₈	5 ¹ / ₁₆	11 ¹ / ₃₂	7 ¹ / ₈
CES2214	7 ¹ / ₁₆	4 ⁵ / ₈	2 ³ / ₁₆	3 ³ / ₈	2 ¹ / ₄	4 ¹ / ₈	5 ¹ / ₁₆	11 ¹ / ₃₂	7 ¹ / ₈
CES4233	12	7	2 ¹ / ₈	5 ¹ / ₄	4 ⁷ / ₈	6 ¹ / ₈	7 ¹ / ₁₆	13 ¹ / ₃₂	1 ¹ / ₈
CES4234	12	7	2 ¹ / ₈	5 ¹ / ₄	4 ³ / ₈	6 ¹ / ₈	7 ¹ / ₁₆	13 ¹ / ₃₂	1 ¹ / ₈

CESD

Cat. #	a	b	e	f	g	h	j
CESD2213	7 ⁵ / ₈	6 ³ / ₈	4 ¹ / ₄	5	1 ¹ / ₈	11 ¹ / ₃₂	13 ¹ / ₁₆
CESD2214	7 ⁵ / ₈	6 ³ / ₈	4 ¹ / ₄	5	1 ¹ / ₈	11 ¹ / ₃₂	13 ¹ / ₁₆
CESD4233	13 ¹ / ₂	9 ³ / ₈	6 ¹ / ₄	7 ¹ / ₄	3	13 ¹ / ₃₂	1 ¹ / ₁₆
CESD4234	13 ¹ / ₂	9 ³ / ₈	6 ¹ / ₄	7 ¹ / ₄	3	13 ¹ / ₃₂	1 ³ / ₁₆

2P

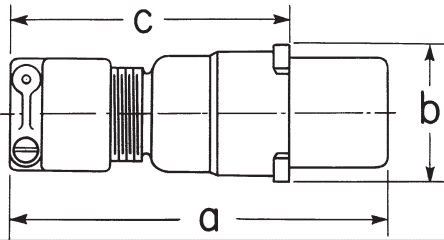

CPH

Cat. #	a	b	c
CPH7713	6	2 ³ / ₈	4 ⁵ / ₁₆
CPH7913	6 ¹ / ₁₆	2 ³ / ₈	4 ³ / ₄
CPH7714	6	2 ³ / ₈	4 ⁵ / ₁₆
CPH7914	6 ¹ / ₁₆	2 ³ / ₈	4 ³ / ₄
CPH7733	7 ³ / ₄	2 ³ / ₄	5
CPH7933	8 ¹ / ₈	2 ³ / ₄	5 ³ / ₈
CPH7734	7 ³ / ₄	3 ¹ / ₁₆	5
CPH7934	8 ¹ / ₈	3 ¹ / ₁₆	5 ³ / ₈

Authorised Distributor:



46, Jalan SS 22/21, Damansara Jaya,
47400 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.
Email: ampmech@ampmech.com
Website: www.ampmech.com

For U.S., CESD is also suitable for Class I, Group C when used with immediately adjacent seals.