


SECURITY SIGHT WINDOW

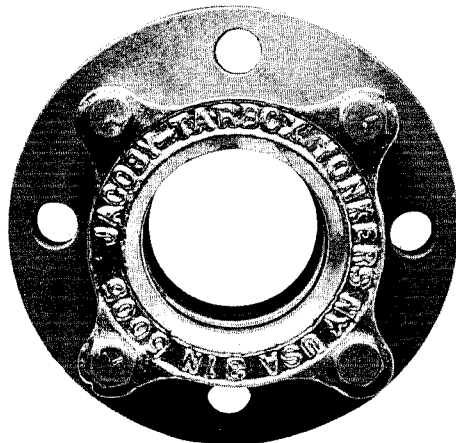


The Security Sight Window incorporates all the fine safety features of the patented Dual Window. It will add protection against stress concentration, thermal shock, corrosion or erosion, over pressure, and external mechanical forces.

Under severe corrosion conditions, request TFE lined Sight Windows Style 5005-TFE at reduced cost compared to glass lining. Special linings of rubber, FRP or PVC are also available.

Style 5005-DW

These bolt-on type styles are designed for attachment to ANSI standard flanges or studding outlets with ANSI flange connection dimensions. There is no indicator so they are omni-positional.

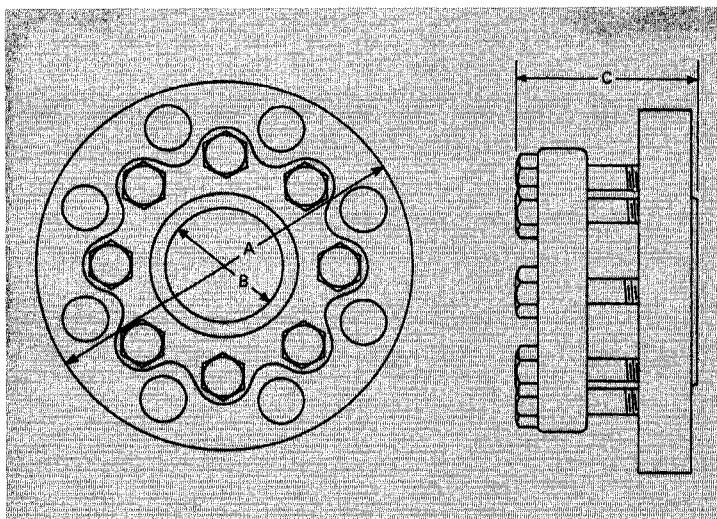

STYLE 5005-DW

Size	Flange & Pressure Rating*	A	B	C	Approx. Weight
2"	150#	6"	2"	2-5/8"	7#
2"	300#	6-1/2"	2"	2-23/32"	9#
2"	600#	6-1/2"	2"	3-3/32"	10#
3"	150#	7-1/2"	3"	3-1/16"	13#
3"	300#	8-1/4"	3"	3-11/16"	20#
3"	600#	8-1/4"	3"	4-5/16"	23#
4"	150#	9"	4"	2-15/16"	21#
4"	300#	10"	4"	4"	36#
4"	600#	10-3/4"	4"	4-3/4"	45#
6"	150#	11"	6"	3-9/16"	30#
6"	300#	12-1/2"	6"	4-25/32"	54#
6"	600#	14"	6"	6-19/32"	86#
8"	150#	13-1/2"	8"	4-5/32"	47#
8"	300#	15"	8"	6-3/32"	90#
8"	600#	16-1/2"	8"	7-29/32"	137#

* Higher Pressure Ratings Available

Authorised Distributor:

AMPMECH

46, Jalan SS 22/21, Damansara Jaya,
47400 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.

Email: ampmech@ampmech.com

Website: www.ampmech.com