

PRESSURE CONTROL

Back pressure regulators RP 820

High pressure valve for high to very high flow rates



Technical data

Connection DN	40 - 400
Nominal pressure PN	10 - 63
Inlet pressure	2 - 40 bar
Differential pressure	min. 2 bar
K_{vs} value	20 - 900 m ³ /h
Temperature	130 °C
Medium	liquids and gases

Description

Self-acting back pressure regulators are simple control valves offering accurate control while being easy to install and maintain. They control the pressure upstream of the valve without requiring pneumatic or electrical control elements.

The RP 820 back pressure regulator is a pilot-controlled control valve consisting of a main valve, a pilot valve complete with restrictor assembly and built-in strainer mounted on the cover of the main valve, non-return valve and restrictor valves. The valve cone can be fitted with a soft or metallic seal. When the pipeline is depressurised the main valve is kept closed by a pre-loaded spring.

When the inlet pressure is above the set pressure the pilot valve is kept open by a piston. The control medium can flow towards the valve outlet. Restrictor D1 produces a pressure drop causing the outlet pressure to be almost equal to the pilot pressure in the main valve piston. The inlet pressure overcomes the pilot pressure and closing force of the spring and opens the main valve.

When the inlet pressure has reached the set pressure, the pilot valve restricts the flow. This causes the pilot pressure to rise and push the main valve piston into a controlling position. The restrictors D1 and D2 are used to optimise the control characteristics. The bypass equipped with a non-return valve brings about rapid closure.

When the inlet pressure falls below the set pressure the pilot valve closes. The pilot pressure is equal to the inlet pressure. The main valve closes as the piston diameter is greater than the valve seat. The spring also forces the valve to close.

The valve is piped internally. The pulse lines must be installed on-site. These valves are no shut-off elements ensuring a tight closing of the valve. In accordance with DIN EN 60534-4 and/or ANSI FCI 70-2 they may feature a leakage rate in closed position in compliance with the leakage classes III or V.

Standard

- » Pilot valve made of stainless steel
- » Throttle block with integrated strainer and throttle valves completely made of stainless steel

Options

- » Version for gases
- » Hard-faced valve cone and seat
- » Special versions on request

Product



Picture similar

Technical specification

K_{vs} values [m³/h]


nominal diameter DN	40	50	65	80	100	125
K_{vs} value m ³ /h	20	32	50	60	70	150

K_{vs} values [m³/h]

nominal diameter DN	150	200	250	300	350	400
K_{vs} value m ³ /h	250	350	500	600	700	900

Setting ranges [bar], nominal pressure

2 - 5	4 - 12	10 - 20	15 - 40
PN 10	PN 25	PN 40	PN 63

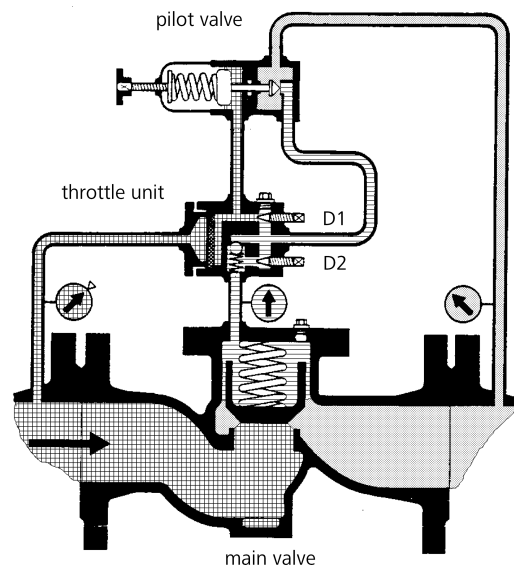

Materials

Materials		
Temperature	80 °C	130 °C
Body	PN 10	spheroidal cast iron or cast steel
	PN 25, 40, 63	cast steel
	PN 10 - 63	stainless steel
Cover	steel optional stainless steel	
Internals	stainless steel	stainless steel
Valve seal	NBR	EPDM
O-ring	NBR	EPDM
Pilot valve, throttle block	stainless steel	stainless steel

Dimensions and weights

Dimensions [mm]							
nominal pressure	size	nominal diameter DN					
		40	50	65	80	100	125
PN 16	A*	200	230	290	310	350	400
PN 40	A*	200	230	290	310	350	400
PN 63 - 160	A*	260	300	340	380	430	
all PN	B	140	160	180	220	220	230
all PN	C	200	220	250	260	280	290

Dimensions [mm]							
nominal pressure	size	nominal diameter D					
		150	200	250	300	350	400
PN 16	A*	480	600	730	850	980	1100
PN 40	A*	480	600	730	850	980	
PN 63 - 160	A*	550	650				
all PN	B	240	270	290	350	350	410
all PN	C	330	390	420	550	550	550

*overall length tolerances in acc. with DIN EN 558

Weights [kg]												
nominal pressure PN	nominal diameter DN											
	40	50	65	80	100	125	150	200	250	300	350	400
16	25	30	40	50	70	120	150	210	380	450	520	625
40	33	38	48	65	80	140	160	240	440	510	580	
63 - 160	40	45	55	80	110		165	290				

Customs tariff number	
84814010	

Recommended installation

- | | |
|---------------------------|------------------|
| 1 Strainer | 4 Safety valve |
| 2 Shut-off valves | 5 Pressure gauge |
| 3 Back pressure regulator | 6 Sense line |

Sense line connection 10 DN before and behind the valve

Authorised Distributor:



46, Jalan SS 22/21, Damansara Jaya,
47400 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.

Email: ampmech@ampmech.com
Website: www.ampmech.com

Please send us your enquiry and allow us to advise you. Special designs on request.
The pressure has always been indicated as overpressure. Mankenberg reserves the right to alter technical specifications without notice.

