

PRESSURE CONTROL

Back pressure regulators UV 1.5

Valve in intermediate flange design for high flow rates



Technical data

Connection DN	25, 50
Nominal pressure PN	40
Inlet pressure	1 - 40 bar
K _{vs} value	10.5 / 19 m ³ /h
Temperature	-20 ... 80 °C up to
Medium	liquids with lubricating property
*RT	= -10 °C TO + 50 °C

Description

Self-acting back pressure regulators are simple control valves offering accurate control while being easy to install and maintain. They control the pressure upstream of the valve without requiring pneumatic or electrical control elements.

The back pressure regulator UV 1.5 is a pilot-operated control valve with proportional control mode consisting of main valve and pilot valve. It is completely made of stainless steel with excellent corrosion resistance. Its intermediate flange design with limited size makes the valve extremely light-weight and compact. The valve cone has a metallic seal.

The sturdy valve design and the metallic valve seal do not require any particular filtration of the operating fluid. Thanks to its medium-wetted movable components, the valve is largely maintenance-free. In addition, it can be installed in any desired mounting position.

Special notes:

The seal on the outlet side must not cover the outflow bore of the pilot valve (observe measurement!)

These valves are no shut-off elements ensuring a tight closing of the valve. In accordance with DIN EN 60534-4 and/or ANSI FCI 70-2 they may feature a leakage rate in closed position in compliance with the leakage classes II.

Standard

- » All stainless steel construction
- » FKM elastomers (O-rings)
- » 2014/68/EU Art. 4 Par. 3

Typical applications

Maintaining the required lub oil pressure for the use of main and auxiliary oil pumps, for ex. compressors, gears, slide bearings, drive shafts etc., Pressure control of fuels / fuel oils in power plants.

Control of minimum quantities for centrifugal pumps with oil / oily fluids. Lub oil systems, for ex. for steam and gas turbines, large diesel engines for ship propulsion and cogeneration units (CHP).

Operating instructions, know how and safety instructions must be observed. The pressure has always been indicated as overpressure. We reserve the right to alter technical specifications without notice.

Product



Picture similar

Technical specification

Kvs values [m³/h]

nominal diameter	DN	25	50
K _{vs} value	m ³ /h	10.5	19

Setting ranges [bar], Nominal pressure

setting range	bar	1 - 20	12 - 40
Nominal pressure	PN	40	40

Materials

Materials	
Body, Spring , Inner parts, Screws	Stainless steel 1.4404
Inner parts	Stainless steel 1.4404 / 1.4462 / 1.4301
O-ring	FKM
Spring	Stainless steel 1.4310
Screws	Stainless steel A4-70

*All materials equal or of higher quality


Dimensions and weights

Dimensions [mm]		
size	nominal diameter DN	
	25	50
A	40	50
B	75	85
øD	70	100
øE	22	25
øF	49	69

Flanges	
nominal diameter DN 25	nominal diameter DN 50
EN 1092-1 PN 40 DN 25, DN 32, DN 40 ASME B16.5 CLASS 300, NPS 1 - 1/2"	EN 1092-1 PN 40 DN 50, DN 65 ASME B16.5 CLASS 300, NPS 2 - 1/2"


Weight [kg]		
nominal diameter	DN	Weight
	25	1.0
	50	2.4

Customs tariff number	
84814010	

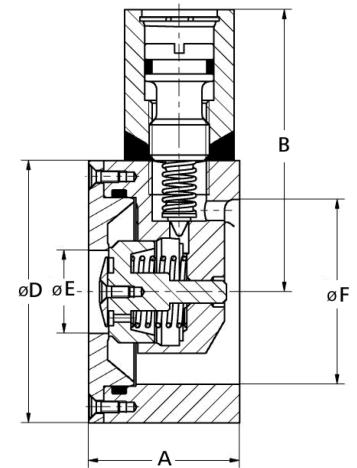

Function


Main valve		Pilot valve	
1	Body	9	cone
2	countersunk head screw	10	compression spring
3	O-ring	11	Adjusting screw
4	seat	12	O-ring
5	piston	13	circlip
6	baffle plate		
7	countersunk head screw		
8	compression spring		

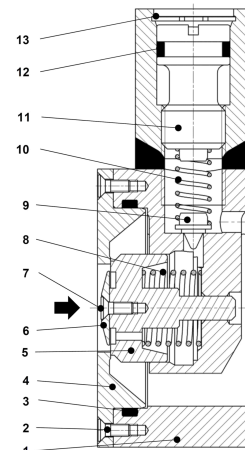

To control the upstream pressure, the required set pressure at the valve is set at the adjusting screw (11). Use a common slot screwdriver for this purpose. Turning to the right increases the set pressure, turning to the left reduces the set pressure. The piston chamber is fed via the gap at the baffle plate (6) and the control bore in the piston (5). In closed condition, the closing forces at the piston (5) prevail and keep the valve closed.

Once the pressure in the piston chamber goes beyond the set pressure, the cone (9) is lifted off the seat of the pilot valve against the pressure spring (10). The outflow to the outlet side causes a pressure drop in the piston chamber which lifts the piston (5) off the seat (4) and opens the back pressure regulator. The resulting balance of opening and closing forces keeps the piston (5) in position.

Control curve

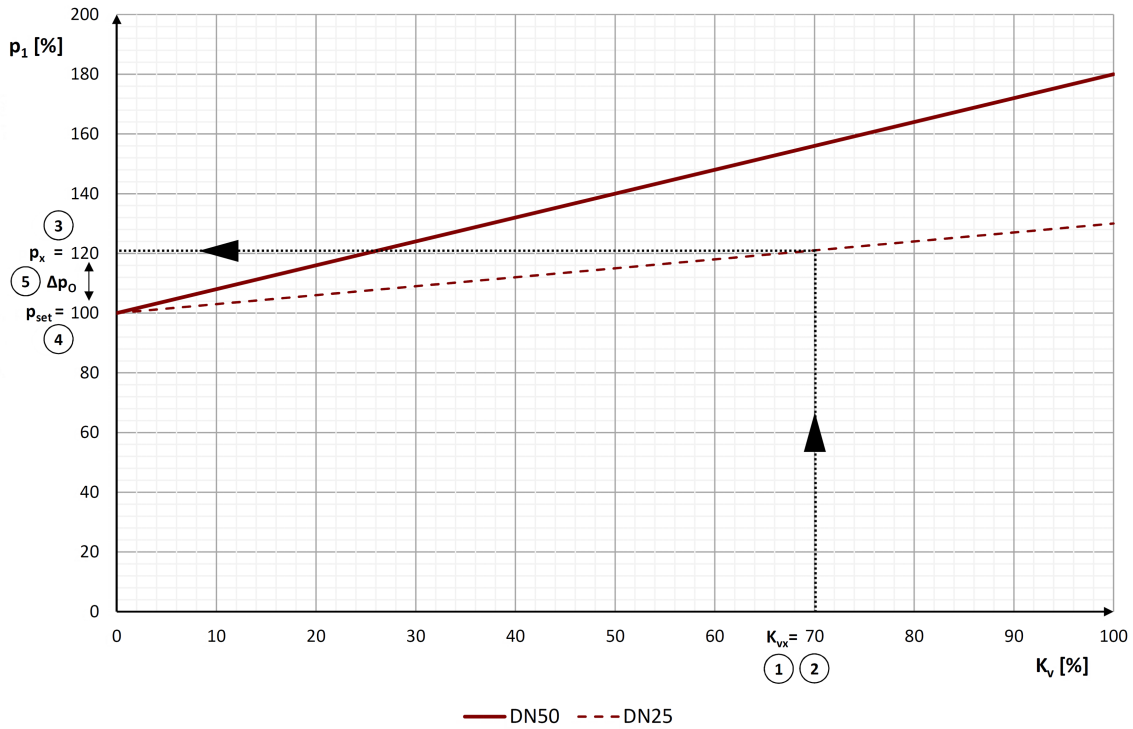

Example


Determination of opening pressure difference Δp_O for UV1.5 DN25

hydraulic oil ISO VG 46, $T = 60\text{ }^\circ\text{C}$, $Q = 23.6\text{ m}^3/\text{h}$, $p_1 = 10\text{ barg}$, $p_2 = 0\text{ barg}$, $K_{vs} = 10.5\text{ m}^3/\text{h} = 100\%$

1. $K_v = 7.3\text{ m}^3/\text{h}$
2. $K_{vx} = k_v / K_{vs} \times 100\% = 70\%$
3. $p_x = p_1 = 10\text{ barg} = 120\%$
4. $p_{set} = p_1 / p_x \times 100\% = 10\text{ barg} / 120\% \times 100\% = 8.3\text{ barg}$
5. $\Delta p_O = p_x - p_{set} = 10\text{ barg} - 8.3\text{ barg} = 1.7\text{ bar} = 20\%$

The expected pressure drop from the operating point until the valve closes is 1.7 bar.

Flow chart

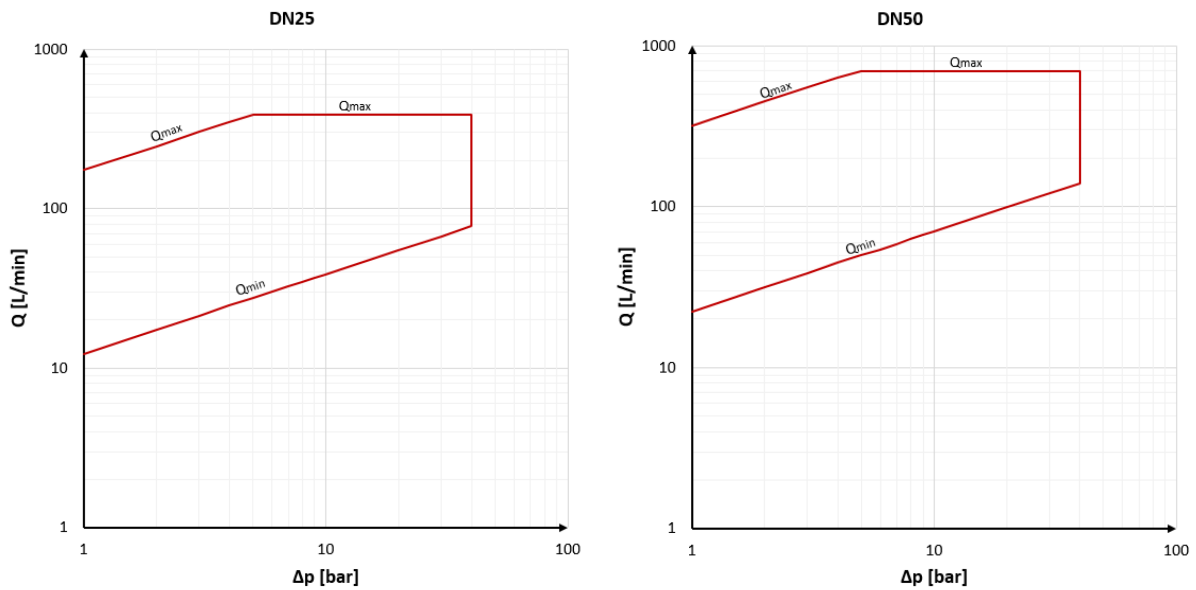

Please send us your enquiry and allow us to advise you. Special designs on request.

The pressure has always been indicated as overpressure. Mankenberg reserves the right to alter technical specifications without notice.

Authorised Distributor:



46, Jalan SS 22/21, Damansara Jaya,
47400 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.

Email: ampmech@ampmech.com

Website: www.ampmech.com