

# Mini-Magnicator™

Light Duty Magnetic Level Gage

**Superior  
Visibility  
Compact  
Design**



**JERGUSON®**

A PRODUCT OF CLARK-RELIANCE

# Jerguson Mini-Magnicator™


## Models Beginning With: MII-15B

The Mini-Magnicator is specifically designed for the light duty industrial market. These versatile and economical level devices can be utilized in a variety of applications.


### How it works

The Magnetic Level Gage chamber contains a float, with magnets, that rises and falls as liquid level changes in the storage vessel. The float is magnetically coupled to the external indicator, whose flags rotate to indicate level, as the float travels by. The updated design utilizes the Jerguson patented magnetic arrangement for superior reliability.

### The Magnet Matters!

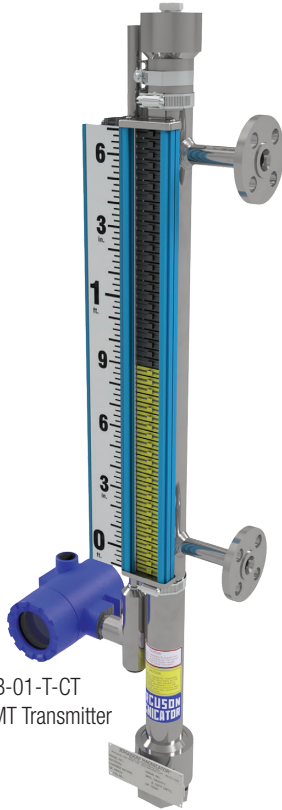

MII-15B-01-T-CT  
With JMT Transmitter

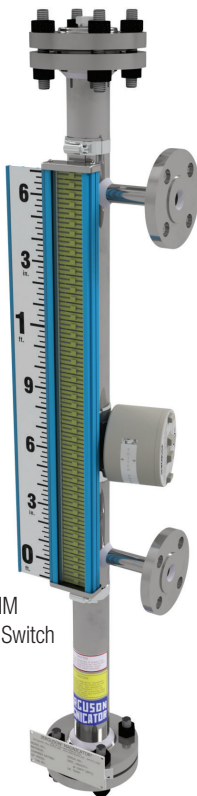

MII-15B-01-T-MM  
With RS/2 Reed Switch



### Features

- Superior visual level indication from extended distance
  - *Wide Indicator standard (flags with integral magnets)*
- **NEW!** Float design can now operate reed switches and various transmitters
- Shock and vibration resistant
- Considerable upgrade for armored or tubular glass with
  - *Less maintenance and leak paths*
- Easy Installation
- Economical means for level indication
- Construction to ASME B31.3 std. / B31.1 optional
- Custom Engineered designs

### Specifications

- 1.5" Sch 10 Chamber
  - Max Pressure: 475 psig (32.7 barg)
  - Max Temp: 650°F (343°C)
  - S.G. Down to .59
  - Flange Class: 150# & 300#
  - Materials of Construction: All 316SS, All 304SS, 316 or 304 with CS trim
  - Visible Range: 1' – 18.5'
  - NACE MR0103/0175
- (Consult M100.30 Magnicator Specification Guide for configuration selection)*

Jerguson uses a unique float construction with 360 degree ring magnets with north poles opposing. This yields a strong focused magnetic field which eliminates skipped flags and provides reliable activation of switches and transmitters.

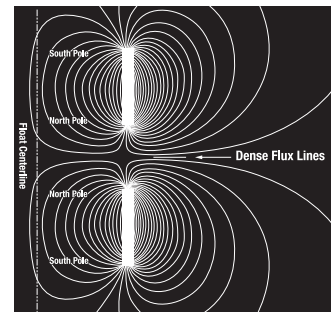

## Selection Guide

		Mini-Magnicator™	Magnicator II
<b>Float</b>	360 degree Magnetic Float Arrangement	+	+
	Float Material - Titanium	+	+
	Float Material - 316SS, HastC, Monel, Alloy20, PVDF, Spherical	-	+
	Minimum S.G.	.59	.36
<b>Chamber Construction</b>	Pipe Size - 1-1/2" Sch 10	+	-
	Pipe Size - 2, 2-1/2", 3" Sch 40 - 160	-	+
	Branch Connection - Welded Pipe Nipple	+	+
	Branch Connection - Reinforced O-Let	-	+
	Branch Connection - Butt Weld Tee	-	+
	Materials Availability - 316SS, 304SS, CS Trim	+	+
	Material Availability - Exotic Alloys	-	+
	Flashproof Style	-	+
	Pressure Rating	475 psig (32.7 barg)	3500 psig (241.3 barg)
	Temp Rating	650°F (343°C)	1000°F (537°C)
<b>Indicator (w/ Integral Magnets)</b>	Wide Flag	+	+
	Standard Flag	+	+
	NightStar® (LED illuminated)	+	+
	Hermetically Sealed (Glass or Polycarb)	+	+
	Scale Type (ft/in, M/mm, %, Volume, Custom)	+	+
<b>Accessories</b>	Magnetostrictive Transmitter (JMT™, MTII4300™)	+	+
	Reed Transmitter (RST2)	+	+
	Reed Switches (RS-2™, RS 2/2™)	+	+
	SAS-16™ Switches (Tri-Magnet)	-	+

Available + Not Available -

## Available Options & Accessories

- JMT – Magnetostrictive Transmitter
- RST2 – Reed Switch Transmitter
- RS-2 – Reed Switch (SPDT)
- RS-2/2 – Reed Switch (DPDT)
- Hermetically Sealed Indicators
- NightStar Indicator (LED Illuminated)




## Common Applications



### Refining / Gas Processing / Petrochemical

Storage Vessels  
Lube oil skids  
Separation Vessels  
Hydraulic Reservoirs  
Scrubbers  
Diesel, Propane storage  
Coalescers  
Various OEM Skids



### Chemical

Storage Vessels  
Chemical Reaction / Injection  
Refrigeration  
Solvent Tanks  
Agricultural  
Pharmaceutical Skids



### Power

Package Boilers  
Deaerator tanks  
Feed Water  
Heating Condensers  
Hot Wells  
Storage Vessels

# MORE **Jerguson**<sup>®</sup> SOLUTIONS



**Jerguson**  
360<sup>™</sup> Valve



**Jerguson Tri-Magnet**<sup>™</sup>  
Level Switches



**Jerguson SafeView**<sup>™</sup>  
Safety & Protection



**Jerguson LumaStar**<sup>™</sup>  
Level Gage Illuminators

Authorised Distributor:

 **AMPMECH**

46, Jalan SS 22/21, Damansara Jaya,  
47400 Petaling Jaya,  
Selangor Darul Ehsan, Malaysia.  
Email: [ampmech@ampmech.com](mailto:ampmech@ampmech.com)  
Website: [www.ampmech.com](http://www.ampmech.com)

**JERGUSON**<sup>®</sup>  
A PRODUCT OF CLARK-RELIANCE



ISO 9001:2015