

200MM DECK SCALER

TFP200



THE TFP200 DECK SCALER IS PERFECT FOR REMOVING COATINGS AND CORROSION FROM DECKS, HATCHES AND TANK TOPS.

The rigid steel chassis ensures a strong, stable machine suitable for accurate surface preparation.

A wide range of attachments are available for light corrosion and cleaning through to heavy descaling.

Full “voyage packages” are available complete with consumables, power cables and spares to ensure work doesn’t stop.

Production rates up to 30m² per hour


TVS® Dust control options available

FEATURES & BENEFITS

- 200mm cutting width
- Easy to use, maintain and manoeuvre
- Precise screw type scaling head adjustment
- Angled dust port allows connection of industrial dust collector giving virtually dust free performance
- Choice of electric, petrol and pneumatic power sources
- Supplied complete & ready to work with cutter head

APPLICATIONS

- Suitable for large area descaling while remaining compact for easy manoeuvrability.
- Removal of hard coatings
- Removal of coatings and scale from steel surfaces

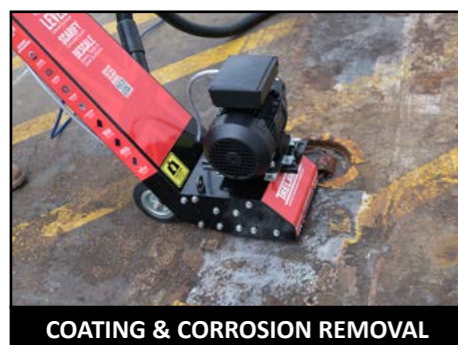

COATING & CORROSION REMOVAL



IDEAL FOR DECK MAINTENANCE



DUST FREE DESCALING

200MM DECK SCALER

TFP200

KEY CONSUMABLES & ACCESSORIES

Image	Part Number	Description
	Trelawny: 320.5500 IMPA: 59.22.41 ISSA: 55.096.10	Tungsten Carbide Tipped Cutters For heavy deck descaling
	Trelawny: 320.3658 IMPA: 59.22.42 ISSA: 55.096.11	Star Cutters For the removal of paint and coatings
	Trelawny: 320.5120 IMPA: 59.22.43 ISSA: 55.096.12	Beam Cutters For the removal of paint and coatings
	Trelawny: 320.4140 IMPA: N/A ISSA: N/A	Spacers Used to create a gap in between cutters.
	Trelawny: 320.9620 IMPA: 59.22.45 ISSA: 55.096.13	Twisted Wire Brush For general cleaning and removal of light surface rust.
	Trelawny: 320.9610 IMPA: 59.22.44 ISSA: 55.096.14	Crimped Wire Brush For general cleaning and removal of light surface rust.

Image	Part Number	Description
	Trelawny: 320.002H IMPA: 59.22.47 ISSA: 55.096.16	Heavy Duty Drum Complete with 12mm shafts
	Trelawny: 320.0020 IMPA: 59.22.49 ISSA: 55.096.18	Cutter Shafts 12mm Diameter
	Trelawny: 669.3121 IMPA: N/A ISSA: N/A	110v Power Cable 20 metres
	Trelawny: 669.3122 IMPA: N/A ISSA: N/A	230v Power Cable 20 metres
	Trelawny: 669.3124 IMPA: N/A ISSA: N/A	440v Power Cable 20 metres
	Trelawny: 843.0752 IMPA: N/A ISSA: N/A	3/4" air hose complete with couplings 15m length

- Note: Please see page 26 for detailed information on the full TFP200 accessories range.

TECHNICAL DATA

Model	Trelawny Part No:	IMPA Part No:	ISSA Part No:	Power (HP - kW)	Voltage (v)	Cycle (Hz)	Cutter Speed (RPM)	Weight (Kg)	Plug Size	Cable Size (mm)	Cable Length	Engine Type	Air Consumption
TFP200 Petrol TCT	320.2400T	N/A	N/A	5.5 - 4.1	-	-	1833	59	-	-	-	Honda GX160	-
TFP200 110v TCT	320.2402T	59.22.34	55.096.02	3 - 2.2	110	50	1650	68	32 Amp	Min. 2.5 core	20m	-	-
TFP200 230v TCT	320.2404T	59.22.36	55.096.03	3 - 2.2	230	50 / 60	1650	68	16 Amp	Min. 2.5 core	40m	-	-
TFP200 400v TCT	320.2406T	59.22.37	55.096.04	3 - 2.2	400	50 / 60	1650	68	16 Amp	Min. 2.5 core	40m	-	-
TFP200 110v TCT	320.2416T	59.22.35	55.096.05	3 - 2.2	110	60	1650	68	32 Amp	Min. 2.5 core	20m	-	-
TFP200 Air TCT	320.2412T	59.22.31	55.096.01	3.5 - 2.6	-	-	1528	45	-	-	-	-	78lps - 165cfm

DIMENSIONS

Working Width (mm)	Length (mm)	Width (mm)	Height (mm)	Maximum Cutting Depth (mm)	Vacuum Take Off Diameter (mm)
200	900	360	900	3	50

- *Trelawny recommends the use of a minimum 5 Kva continuous rated centre tap transformer with their 110v machines.
- All part numbers specified above are for machines complete with 5 point tungsten carbide tipped (TCT) cutters. For machines requiring alternative cutting media please specify.