

**TECHNICAL DATA**

# Fluke 301E Series AC/DC Clamp Meter



## Key features

- The body weighs only 154g and is 16mm thick, which is light and portable and can be put into a pocket
- The slim and thin jaw of only 10mm can easily fit into tightly packed wires
- 1000A AC/DC (E model), 0.01A high resolution
- Tests voltage, resistance and continuity
- Tests current frequency and voltage frequency
- Tests capacitance and diodes
- Backlight

## Product overview: Fluke 301E Series AC/DC Clamp Meter

The Fluke 301E Series AC/DC Clamp Meter is designed with a lightweight and compact body, which allows you to carry it around in your pocket. The slim and thin jaw can easily fit into tightly packed wires. The Fluke 301E test current, voltage, resistance, continuity, frequency (voltage and current), capacitance, and diode, etc.. You can handle multiple test needs with just one tool. With the AC/DC function, it can be applied to more application scenarios requiring DC testing, such as new energy of PV and wind power, new energy vehicles, communications, data centers, etc..

## Specifications: Fluke 301E Series AC/DC Clamp Meter


Models		301D		301E		
AC Current (45 to 400 Hz)	Range	60.00 A	600.0 A	60.00 A	600.0 A	1000 A
	Resolution	0.01 A	0.1 A	0.01 A	0.1 A	1 A
	Accuracy	2% + 10	2% + 5	2% + 10	2% + 5	2% + 5
DC Current	Range	60.00 A	600.0 A	60.00 A	600.0 A	1000 A
	Resolution	0.01 A	0.1 A	0.01 A	0.1 A	1 A
	Accuracy	2% + 10	2% + 5	2% + 10	2% + 5	2% + 5
AC Voltage (45 to 400 Hz)	Range	600.0 V		600.0 V		
	Resolution	0.1 V		0.1 V		
	Accuracy	1.5% + 5		1.5% + 5		
DC Voltage	Range	600.0 V		600.0 V		
	Resolution	0.1 V		0.1 V		
	Accuracy	1% + 5		1% + 5		
Resistance	Range	600.0 $\Omega$ 6.000 k $\Omega$ 60.00 k $\Omega$		600.0 $\Omega$ 6.000 k $\Omega$ 60.00 k $\Omega$		
	Accuracy	1% + 5		1% + 5		
Voltage Frequency	Range	9.999 Hz 99.99 Hz 999.9 Hz 9.999 kHz 99.99 kHz		9.999 Hz 99.99 Hz 999.9 Hz 9.999 kHz 99.99 kHz		
	Accuracy	0.1% + 3		0.1% + 3		
Current Frequency	Range	45.0-400.0 Hz		45.0-400.0 Hz		
	Accuracy	0.1% + 3		0.1% + 3		
Capacitance	Range	9.999 $\mu$ F	99.99 $\mu$ F 999.9 $\mu$ F	9.999 $\mu$ F	99.99 $\mu$ F 999.9 $\mu$ F	
	Accuracy	2% + 5	5% + 5	2% + 5	5% + 5	
Diode	Range	3.000 V		3.000 V		
	Accuracy	10%		10%		
T-rms Value			-	-		
Continuity			□	□		
Hold			□	□		
Backlight			□	□		
Safety rating			CAT III 300 V	CAT III 300 V		
Weight			154 g	154 g		
Size			190 mm x 52 mm x 16 mm	190 mm x 52 mm x 16 mm		

Jaw Opening	34 mm	34 mm
Clamp Arm Size	10 mm X 10 mm	10 mm X 10 mm
Battery	(2) AAA batteries	(2) AAA batteries
Warranty	1 year	1 year

#### General Specifications

<b>Maximum Voltage between any Terminal and Earth Ground</b>	<b>300 V</b>
Maximum Differential Voltage between V/Ω and COM Terminals	600 V
Display (LCD)	6000 counts, updates 3 times per second
Battery Type	2 AAA, IEC LR03
Battery Life	500 hours minimum
Auto Power Off Time	20 minutes
Temperature	Operating: -10 °C to 50 °C
	Storage: -30 °C to 60 °C
Relative Humidity	Operating Humidity: Non condensing (<10°C); □ 90 % RH at 10 °C to 30 °C; □ 75 % RH at 30 °C to 40 °C; □ 45 % RH at 40 °C to 50 °C;
Altitude	Operating: 2000 m; Storage: 12000 m
Temperature Coefficient	0.1 x (specified accuracy) /°C (<18 °C or >28 °C)
Dimensions (H x W x L)	190 mm x 52 mm x 16 mm
Weight	132 g (301D/E 154 g)
Jaw Opening	34 mm
Ingress Protection Rating	IP30
Safety	IEC 61010--1, IEC61010-2-032 CAT III 300 V, Pollution Degree 2
Electromagnetic Environment	IEC 61326--1: Portable

## Ordering information

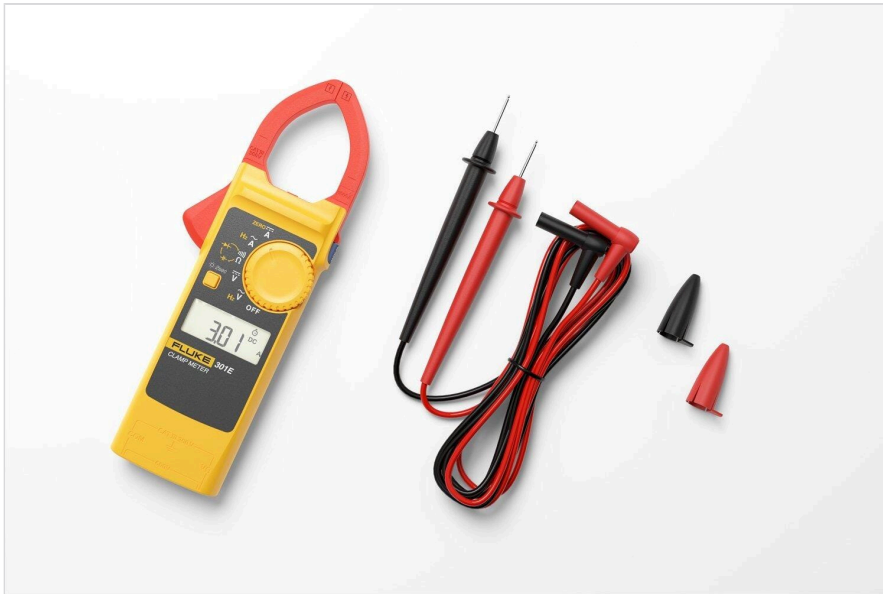

### Fluke 301E Series AC/DC Clamp Meter - EN

Model: Fluke 301E Series AC/DC Clamp Meter

---

Fluke 301E

- Fluke 301E Clamp Meter
  - TL75 test lead
  - (2) AAA batteries
-

**Fluke.** *Keeping your world up and running.®*

**Authorised Distributor:**



46, Jalan SS 22/21, Damansara Jaya,  
47400 Petaling Jaya,  
Selangor Darul Ehsan, Malaysia.  
*Email: [ampmech@ampmech.com](mailto:ampmech@ampmech.com)*  
*Website: [www.ampmech.com](http://www.ampmech.com)*

**Fluke Electronics (Malaysia) Sdn Bhd**

Suite D-3A-4, Block D  
SouthGage Commercial Centre, No2  
Jalan Dua Off Jln Chan Sow Lin  
55200 KL  
Malaysia  
Email: [info.asean@fluke.com](mailto:info.asean@fluke.com)  
[www.fluke.com/my](http://www.fluke.com/my)  
©2025 Fluke Corporation. Specifications subject to  
change without notice.  
10/2025

**Modification of this document is not permitted  
without written permission from Fluke  
Corporation.**