



SPG K



Blind pierceable large grommets with extended range for cables without connectors

FEATURES

- K1, K2 e K3 for cables without connectors with diameters from 16 to 30 mm
- IP66 for SPG K1, K2 and K3

The SPG K are blind grommets which can be used for cables without connectors with diameter from 16 to 30mm. The SPG K0 can be perforated but the IP protection is not guaranteed. Thanks to the double membrane in the SPG K1-K2-K3 grommets, an optimal protection against dust and water is achieved.

Material: TPE, halogen-free, silicone-free

Flammability: self-extinguishing acc. to UL94-V0 (grey and black)

Temperature: -40°C... +110°C (static)


Material successfully tested for UV and water exposure resistance according to UL 746C related procedures, suitable for outdoor applications.

RELATED PRODUCTS


- DES 24
- DES 16
- DES 10
- DES Q
- DESPRED
- DESCLICK
- DES 24M
- DES 24MX
- DES 16M
- DES 16MX
- UltraTray 4



Model	Code	Model	Code	Ø Cable min/max (mm)	Pcs (/pack)
					
SPG K0G	1731022300	SPG K0B	1731022400	max. 32	10
SPG K1G	1731022310	SPG K1B	1731022410	16 - 22	
SPG K2G	1731022320	SPG K2B	1731022420	23 - 26	
SPG K3G	1731022330	SPG K3B	1731022430	26 - 30	

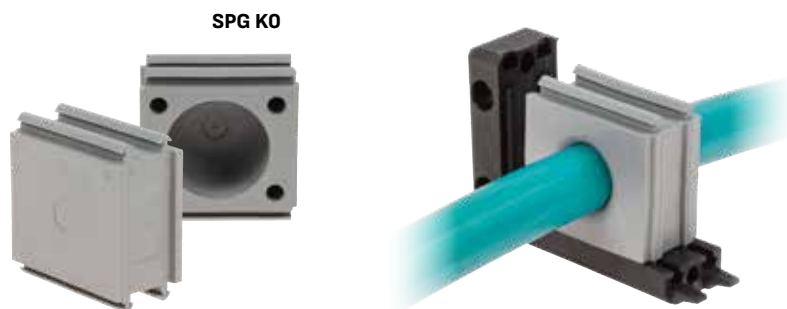

Dimensions (mm)

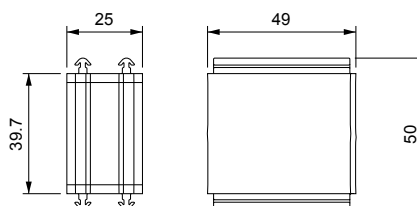

Authorised Distributor:

AMPMECH

46, Jalan SS 22/21, Damansara Jaya,
47400 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.
Email: ampmech@ampmech.com
Website: www.ampmech.com



IP66

NEMA
12, 4X



ECOLAB



RoHS
COMPLIANT



© Detas SpA - ISO9001/ ISO14001 certified company
Via Tre Ponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - www.detasultra.com