




SPG M



Multiple large grommets for cables without connectors

Double parallel membrane



FEATURES

- Multiple grommets for high number of cables without connectors
- Grey and black colours available
- UL94-V0 for both colours
- Strain relief according to EN 62444

The SPG M grommets enable a high number of cables without connectors to be routed into the DES splittable frames.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid tightness

Material: TPE, halogen-free, silicone-free

Flammability: self-extinguishing acc. to UL94-V0 (grey or black)

Temperature: -40°C... +110°C (static)


Material successfully tested for UV and water exposure resistance according to UL 746C related procedures, suitable for outdoor applications.

RELATED PRODUCTS

- DES 24
- DES 16
- DES 10
- DES Q
- DESPRE
- DESCLICK
- DES 24M
- DES 24MX
- DES 16M
- DES 16MX
- UltraTray 4

Model	Code	Nr. Cables	Ø Cable (mm)	Pcs (/pack)
 SPG M2G	1731022302	2	max. 18	10
 SPG M2B	1731022402			
 SPG M3G	1731022303	3	max. 16	
 SPG M3B	1731022403			
 SPG M4G	1731022304	4	max. 14	
 SPG M4B	1731022402			
 SPG M7G	1731022307	4 2 1	max. 13,5 max. 5 max. 9,5	
 SPG M7B	1731022407			
 SPG M9G	1731022309	9	max. 8	
 SPG M9B	1731022409			
 SPG M14G	1731022314	12 2	max. 6,5 max. 12	
 SPG M14B	1731022414			
 SPG M15G	1731022315	15	max. 7	
 SPG M15B	1731022415			

Dimensions (mm)

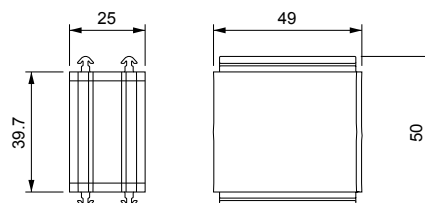

IP66

NEMA 12, 4X

UL TYPE 12, 4X
*indoor only



ECOLAB



Authorised Distributor:

AMPMECH

46, Jalan SS 22/21, Damansara Jaya,
47400 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.
Email: ampmech@ampmech.com
Website: www.ampmech.com

© Detas SpA - ISO9001/ ISO14001 certified company
Via Tre Ponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - www.detasultra.com

