



SPP K



Blind pierceable small grommets with extended range for cables without connectors



FEATURES

- Diameters from 2,5 to 16,5 mm
- "Blind" pierceable grommets
- Grey and black colours available
- UL94-V0 for both colours
- IP66 - NEMA 4X

The SPP K grommets have a dual function: they can be used as "blind" grommets for future application of single cable without connector or they can be used as single grommet for one cable without connector. The size can be chosen between 4 models from 2,5 a 16,5 mm diameter. The double membrane ensures the best water and dust protection together with a great strain relief function.


Material: TPE, halogen-free, silicone-free

Flammability: self-extinguishing
acc. to UL94-V0 (grey or black)


Temperature: -40°C... +110°C (static)

Material successfully tested for UV and water exposure resistance according to UL 746C related procedures, suitable for outdoor applications.

Model	Code	Model	Code	Ø Cable min/max (mm)	Pcs (/pack)
● ●					
SPP K0G	1731021100	SPP K0B	1731023100	"Blind"	10
SPP K1G	1731021110	SPP K1B	1731023110	2,5 - 7	
SPP K2G	1731021115	SPP K2B	1731023115	4,5 - 10	
SPP K3G	1731021120	SPP K3B	1731023120	7,5 - 12,5	
SPP K4G	1731021125	SPP K4B	1731023125	9 - 14	
SPP K5G	1731021127	SPP K5B	1731023127	12 - 16,5	




Double parallel membrane



RELATED PRODUCTS

- DES 24
- DES 16
- DES 10
- DES Q
- DESPED
- DESCLICK
- DES 24M
- DES 24MX15
- DES 24MX
- DES 16M
- DES 16MX
- UltraTray 4

Dimensions (mm)

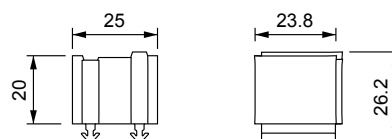

IP66

NEMA
12, 4X

UL TYPE
12, 4X
*indoor only



ECOLAB



Authorised Distributor:

AMPMECH

46, Jalan SS 22/21, Damansara Jaya,
47400 Petaling Jaya,
Selangor Darul Ehsan, Malaysia.
Email: ampmech@ampmech.com
Website: www.ampmech.com

© Detas SpA - ISO9001/ ISO14001 certified company
Via Tre Ponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - www.detasultra.com

